


INTERNAL SERRATION

.315 Shank Diameter 1.75 Overall Length SERRATION

Nominal Size	No. of Teeth	B	ORDER#
5/16	11	.3165	343-3165
	15	.3165	345-3165
	19	.3165	347-3165
11/32	12	.3480	343-3480
	16	.3480	345-3480
	21	.3480	347-3480
3/8	14	.3790	343-3790
	18	.3790	345-3790
	23	.3790	347-3790
13/32	15	.4100	343-4100
	19	.4100	345-4100
	24	.4100	347-4100
7/16	16	.4415	343-4415
	21	.4415	345-4415
	26	.4415	347-4415

.500 Shank Diameter 1.75 Overall Length SERRATION


Nominal Size	No. of Teeth	B	ORDER#
5/16	11	.3165	503-3165
	15	.3165	505-3165
	19	.3165	507-3165
11/32	12	.3480	503-3480
	16	.3480	505-3480
	21	.3480	507-3480
3/8	14	.3790	503-3790
	18	.3790	505-3790
	23	.3790	507-3790
13/32	15	.4100	503-4100
	19	.4100	505-4100
	24	.4100	507-4100
7/16	16	.4415	503-4415
	21	.4415	505-4415
	26	.4415	507-4415
15/32	17	.4730	503-4730
	22	.4730	505-4730
	28	.4730	507-4730
1/2	18	.5040	503-5040
	24	.5040	505-5040
	30	.5040	507-5040
17/32	19	.5350	503-5350
	25	.5350	505-5350
	32	.5350	507-5350
9/16	20	.5665	503-5665
	27	.5665	505-5665
	34	.5665	507-5665
19/32	21	.5980	503-5980
	28	.5980	505-5980
	36	.5980	507-5980

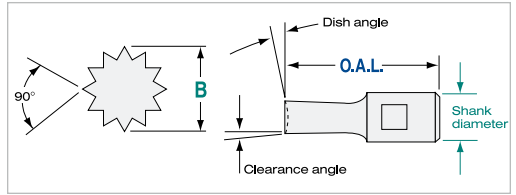

ADDITIONAL SERRATION SIZES
Made to order configurations 5-7 working days.

.500 Shank Diameter 2.25 Overall Length SERRATION

Nominal Size	No. of Teeth	B	ORDER#
5/16	11	.3165	543-3165
	15	.3165	545-3165
	19	.3165	547-3165
11/32	12	.3480	543-3480
	16	.3480	545-3480
	21	.3480	547-3480
3/8	14	.3790	543-3790
	18	.3790	545-3790
	23	.3790	547-3790
13/32	15	.4100	543-4100
	19	.4100	545-4100
	24	.4100	547-4100
7/16	16	.4415	543-4415
	21	.4415	545-4415
	26	.4415	547-4415
15/32	17	.4730	543-4730
	22	.4730	545-4730
	28	.4730	547-4730
1/2	18	.5040	543-5040
	24	.5040	545-5040
	30	.5040	547-5040
17/32	19	.5350	543-5350
	25	.5350	545-5350
	32	.5350	547-5350
9/16	20	.5665	543-5665
	27	.5665	545-5665
	34	.5665	547-5665
19/32	21	.5980	543-5980
	28	.5980	545-5980
	36	.5980	547-5980

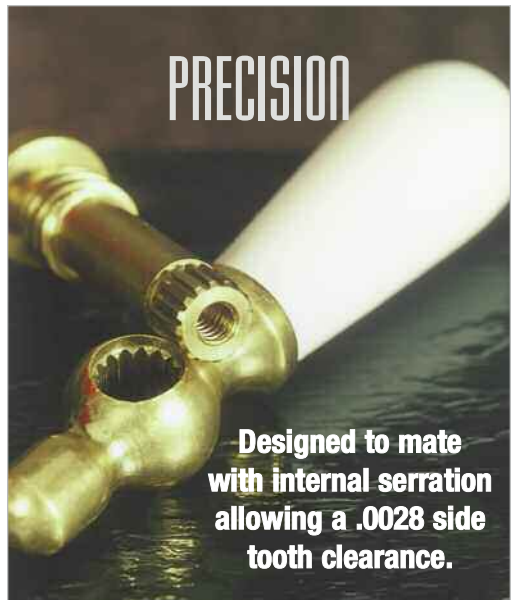

Designed to mate with internal serration allowing a .0028 side tooth clearance.